


AOV IWB-AT65F-2 Interactive WhiteBoard Product Specification

Product Feature

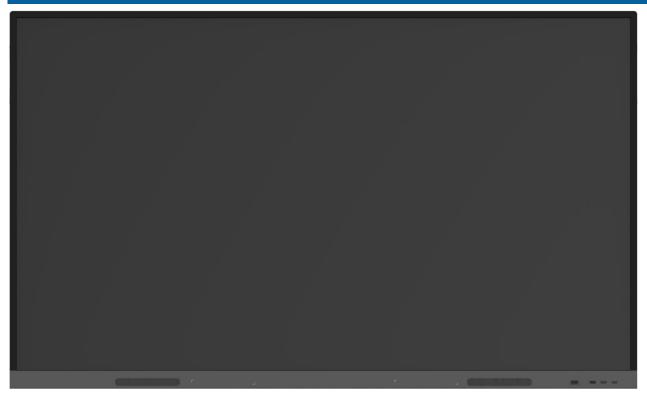


- ♦ Front 2 USB2.0 ports
- ♦ Bottom 1 USB2.0 port only for upgrades the system
- ♦ Front 1 physical key
- ♦ Front loudspeaker
- ♦ 4K ultra HD display
- ♦ IR (Infrared Ray) touch technology
- ♦ AG tempered glass 4mm Mohs level 7
- ♦ Compatible with detachable OPS module

Dimension





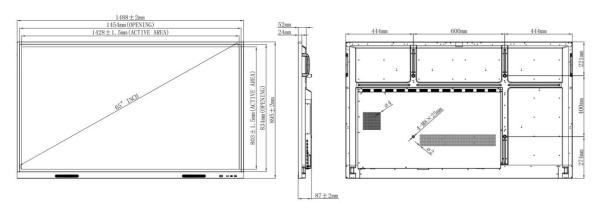



Display

Size 65 inch

Response Time 8ms

Aspect Ratio 16:9

Display Area 1428.48 (H)×803.52(V) mm

Pixel Pitch 0.372×0.372mm

Resolution 3840(H)×2160(V)

Refreshing Frequency 60Hz

Display Color 1.07B(10bit)

Contrast Ratio 1200:1

Viewing Angle 178°(H/V)

Back Light Unit DLED

Brightness with glass (min) 300cd/m²

Brightness with glass (typ) 350cd/m²

Life Time ≥30000 Hours

Android System

System Version Android 8.0

CPU	A73×2+A53×2
GPU	Mali G51×2
RAM	2GB
ROM	16GB
Touch System	
Sensing Type	Infrared recognition
Touch point	20 points touch
Touch Tool	Finger,Passive infrared pen
Minimum object size	3mm
Response Time	≤10ms
Accuracy	±2mm
Writing Height	≤3mm
Surface Hardness	Toughened Glass with Level 7 of Mohs Standard
Interpolation Resolution	32768(W)×32768(D)
Support System	Windows10/Windows8/Windows7/Windows XP
Audio	
Sound Channel	2.0
Output Power	2×10W
Power	
Power Requirements	100-240V~ 50/60Hz 3.0A
Overall Power(Max.)	300W
Standby Power	≤0.5W
I/O port	
HDMI OUT	1
USB 2.0	3
USB 3.0	3
TOUCH OUT	2
HDMI IN	3
VGA IN	1

AUDIO IN	1
RS232	1
AUDIO OUT	1
LAN	1
SPDIF	1

Physical Specifications

Dimension L×H×D 1488×895×87mm

Dimension (package) L×W×H 1656×204×1050mm

Thickness of machine and wall mount 117mm (WIB9060G)

Wall-hanging Screw Spec M8×25mm

VESA 600×400mm

Net Weight 38.75kg

Gross Weight 49.7kg

Accessories

Power Cord(European/American/Australian /British standard optional) ×2 (3 meters)

USB Touch Cable (Type A-B) ×1 (5 meters)

HDMI Cable ×1 (3 meters)

Writing Pen ×2

Remote Control ×1

Battery ×2 (AAA)

Environmental Conditions

Operation Temperature 0° - 40°

Operation Humidity 10% - 90%RH

Storage Temperature -20°C -60°C

Storage Humidity 10% - 90%RH

Altitude Below 5000 meters

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.

Should the above-mentioned change in the document become necessary, the document may be updated without written notice.